



1. DIAMENSION **unit: mm**

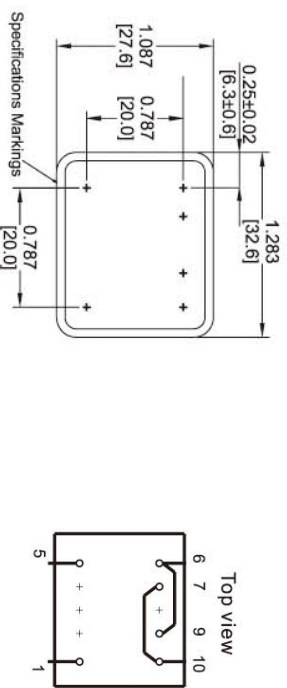


1 Secondary winding



Primary winding

Input	Output
1	1
2	4
3	9
4	16
5	25
6	36
7	49
8	64
9	81
10	100




Single output

2 Secondary windings



Primary winding

Input Output



Dual outputs

**Meet UL-60950 / IEC 60950 / Class B
Self-Extinguished Plastics UL-94V0
Operate frequency 50/60Hz**

3. 2.3VA EI30-18 Series

P/No.	Input Voltage (Vac)	Secondary Voltage(Vac)	No-Load Voltage (Vac)
GT301S06028	115	6	8.6
GT301S09028	115	9	12.9
GT301S12028	115	12	17.2
GT301S24028	115	24	37.9
GT301D06028	115	6 X 2	8.6 X 2
GT301D09028	115	9 X 2	12.9 X 2
GT301D12028	115	12 X 2	17.2 X 2
GT301D24028	115	24 X 2	37.9 X 2
GT302S06028	230	6	8.6
GT302S09028	230	9	12.9
GT302S12028	230	12	17.2
GT302S24028	230	24	37.9
GT302D06028	230	6 X 2	8.6 X 2
GT302D09028	230	9 X 2	12.9 X 2
GT302D12028	230	12 X 2	17.2 X 2
GT302D24028	230	24 X 2	37.9 X 2